

bleiCOLOR-Flah-Ridge

bleiCOLOR-Flash-Ridge,
this double-sided colour-coated corrugated
lead sheet for sealing all standard flah ridge tiles.





ISO TS 16949 for the
manufacture and sale of
battery terminals for lead
accumulators




RÖHR + STOLBERG GmbH · Bruchfeld 52 · 47809 Krefeld
Phone ++49 (0) 21 51-58 92-0 · Fax ++49 (0) 21 51-50 02 70
vertrieb@roehr-stolberg.de · www.roehr-stolberg.de

+ dealer's stamp


bleiCOLOR-First-Grat two-sided colour-coated, pleated lead sheet for all ridge and hip sealing applications

bleiCOLOR ridge and hip seal

First

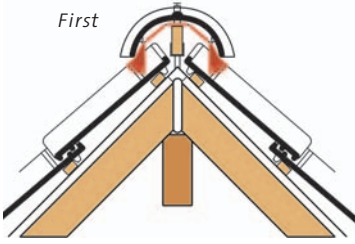

Grat

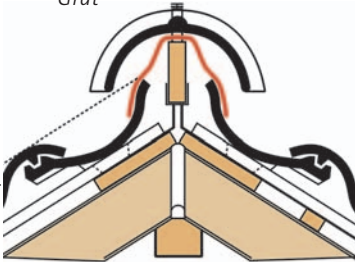

**no gluing in the
ridge and hip area!**

Technical Information:

bleiCOLOR ridge and hip is available in 5-metre rolls, 280 mm and 350 mm wide. The material is available in the colour combinations tile red / dark grey and tile red / brown. Special colours and dimensions are available on request.

Aeration cross-section:

approx. 150 cm²/metre laid
(sufficient for a rafter length
of 15 m as per DIN 4108)

bleiCOLOR ridge and hip is an all-metal solution for the sealing of all typical ridge and hip tiles and a perfect complement to the bleiCOLOR branded product range.

bleiCOLOR-First-Grat is a material that guarantees active and permanent aeration, as well as being quick and easy to work. The aeration openings meet the DIN standard and are so designed to prevent the ingress of moisture and insects and not become blocked with dirt. The pleating makes the material easy to shape and matches the finish of the tiles. The lead sheet is coated in two colours and can be worked on both sides.

Advantages of the bleiCOLOR ridge and hip roll

- no gluing required, can be laid on damp surfaces
- quickly worked and low-weight
- easily shaped and close-fitting
- colour-matched to existing roof colours
- long service life
- can be used either way up
- two-coloured

bleiCOLOR ridge and hip

- UV-resistant
- elastic at stretch points
- long service life
- withstands wind loading
- temperature-resistant
- easily shaped and flexible
- no special tools required for cutting
- light in weight
- quick and easy to work
- good stretch properties
- can be used either way up
- recyclable

Instructions for Installation



Freewheeling on the ridge



Nail in the middle or tack in place



Shape, no gluing required

